


49053



## CLASSIC QUAD LOCK DETACHABLE RING TIP OFF

**⚠ WARNING: UNLOAD FIREARMS BEFORE INSTALLATION TO PREVENT SHOOTING ACCIDENTS.**

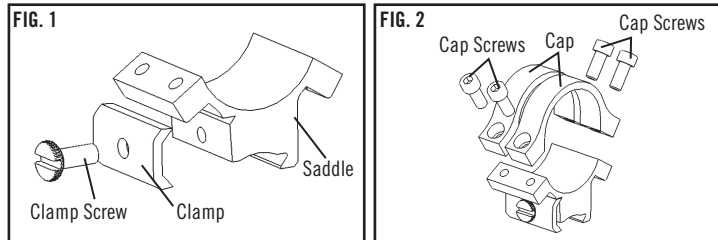

### MOUNTING INSTRUCTIONS

FOR USE ON .22 RIMFIRE RIFLES WITH FACTORY GROOVED RECEIVERS (3/8") ONLY.

1. Assemble saddle, clamp, clamp screw (Fig. 1).
2. Position loosely assembled saddles in receiver grooves. Tighten clamp screw securely.
3. Place scope on saddles. Place ring caps over the scope tube and line up holes with holes in saddles. Use the hex wrench to attach ring caps to saddles with cap socket screws, tightening to a loose fit. Check the reticle in the scope to be sure the upright crosshair is perpendicular to the receiver.
4. Scope optics and design determine eye relief. Refer to scope instructions for correct eye relief information. Be sure you have set proper eye relief BEFORE final tightening of cap screws in Step 5.
5. After correct eye relief has been determined, tighten all socket screws with hex wrench evenly, a little at a time, until the caps hold the scope securely. **IMPORTANT: Ring caps and saddles are designed not to make contact. Make sure there is a gap of about 1/32" between surfaces on both sides of each individual cap. DO NOT OVERTIGHTEN; OVERTIGHTENING MAY CAUSE MARRING OR DAMAGE TO SCOPE TUBE.**
6. Your firearm is now ready for bore sighting and scope sighting-in. Refer to scope instructions for correct procedures.

**IMPORTANT:** Slight movement of scope or mounts will cause gun to shoot inaccurately. Tighten all clamping screws to secure the components. Apply only enough torque to the hardened screw fasteners to prevent movement. Check frequently after firing to be sure there has been no movement of scope or mounts.

**⚠ WARNING: BEFORE SHOOTING FIREARM, BE SURE SCOPE AND MOUNTS ARE ATTACHED SECURELY AND CORRECTLY ALIGNED FOR ACCURATE SIGHTING. WHEN SHOOTING WITH SCOPE OR IRON SIGHTS, BE SURE BUTTSTOCK OF GUN IS HELD FIRMLY AGAINST THE SHOULDER. FOLLOW SCOPE MANUFACTURER'S INSTRUCTIONS WHEN SETTING EYE RELIEF. DO NOT USE .22 CAL. RIMFIRE SCOPES ON CENTERFIRE RIFLES SINCE EYE RELIEF DISTANCE MAY BE TOO SHORT. FAILURE TO FOLLOW THESE PRECAUTIONS COULD CAUSE PERSONAL INJURY FROM RECOIL TO SHOOTER'S EYE AND/OR HEAD, OR RESULT IN DAMAGE TO SHOOTER'S GLASSES.**